

# CAPA WITH HOOKS




**HOTHOT**  
RADIATORS



Material:	steel pipes $\varnothing 28\text{mm}$
	steel pipes $\varnothing 50\text{mm}$
Connection threads:	2xG1/2"
Testing overpressure:	0,65MPa
Max. operating overpressure:	0,5MPa
Max. operating temperature:	95°C
Number of pipes:	6, 8, 10


## Connection Options




Type H/L [mm]	Depth [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Heating Output [W]			Power input [W] Z heat rod., Mini PW, Stone	Connection span [mm]
					75/65/20°C	70/55/20°C	55/45/20°C		
1800/350	78	21,0	19,0	1,28	814	661	423	-	50
1800/470	78	28,0	25,4	1,28	1086	882	565	-	50
1800/590	78	35,0	31,7	1,28	1357	1102	706	-	50

Heat output according to EN442. The weight of radiators is listed without water and package. Accessories is not part of the radiator.

## Type height (H) / length (L) [mm]

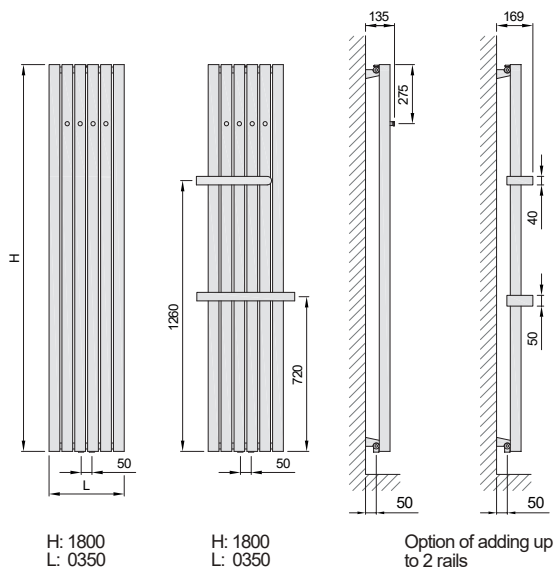

## Fixing



Type	X[mm]	A[mm]
<b>Metal brackets</b>	<b>50</b>	<b>114</b>



1800 0350  
4 hooks



1800 0470  
6 hooks



1800 0590  
8 hooks