


IMPERIAL BATH ROUND




HOTHOT
RADIATORS

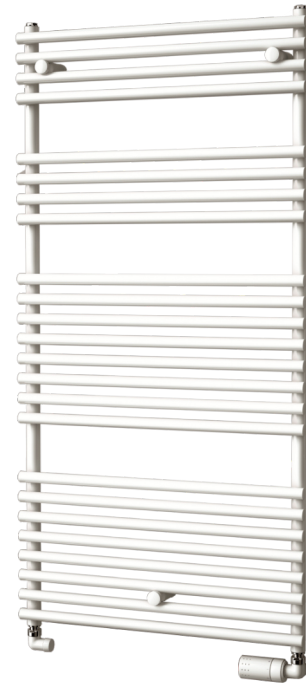

Material:	steel pipes \varnothing 28mm steel pipes \varnothing 22mm
Connection threads:	4xG1/2"
Testing overpressure:	1,3MPa
Max. operating overpressure:	1,0MPa
Max. operating temperature:	110°C
Number of profiles:	14, 24, 36


Connection Options

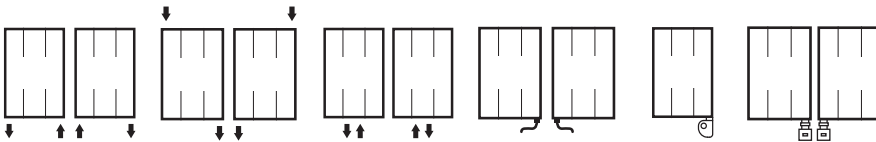

Type H/L [mm]	Depth [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [°C]	Heating Output [W]			Power input [W] Z heat rod, Mini PW, Stone	Connection span [mm]
					75/65/20°C	70/55/20°C	55/45/20°C		
732/500	89	6,1	2,8	1,235	349	286	186	300	446
732/600	102	7,0	3,2	1,235	400	327	213	400	546
1212/500	89	10,4	4,7	1,235	593	485	316	600	446
1212/600	102	12,0	5,5	1,235	682	558	363	700	546
1772/500	89	15,5	7,1	1,235	878	718	467	900	446
1772/600	102	17,9	8,2	1,235	1018	833	542	1000	546

Heat output according to EN442. The weight of radiators is listed without water and package. Accessories is not part of the radiator.

Type height (H) / length (L) [mm]

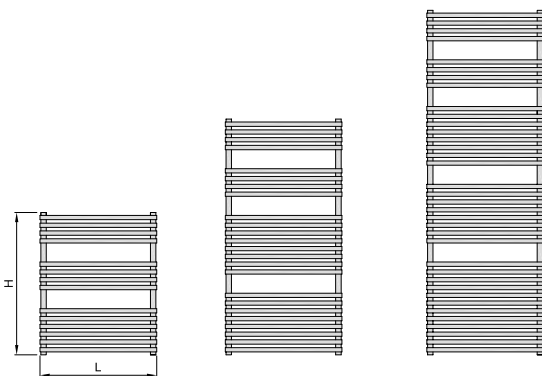


H: 732
L: 500-600

H: 1212
L: 500-600

H: 1772
L: 500-600

Fixing

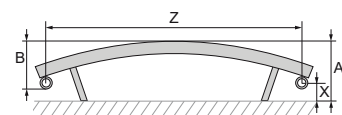

Type	Length [mm]	X [mm]	A [mm]
Plastic holders	500	36-46	111-121
Plastic holders	500	26-36	122-132