

RUBY BATH EXTRA CHROM




HOTHOT
RADIATORS



Material:	steel profiles 40x40mm steel profiles 25x25mm
Connection threads:	4xG1/2"
Testing overpressure:	0,65MPa
Max. operating overpressure:	0,5MPa
Max. operating temperature:	110°C
Number of profiles:	21, 29


Connection Options

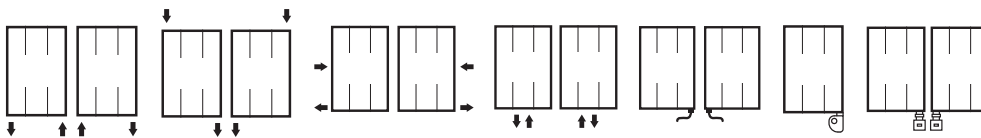

Type H/L [mm]	Depth [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Heating Output [W]			Power input [W] Z heat rod., Mini PW, Stone	Connection span [mm]
					75/65/20°C	70/55/20°C	55/45/20°C		
1255/500	40	15,0	7,7	1,271	405	329	212	400	460
1255/600	40	17,3	8,7	1,271	473	385	247	500	560
1755/500	40	20,5	10,7	1,254	565	461	298	600	460
1755/600	40	23,7	12,1	1,254	659	537	347	700	560

Heat output according to EN442. The weight of radiators is listed without water and package. Accessories is not part of the radiator.


Type height (H) / length (L) [mm]

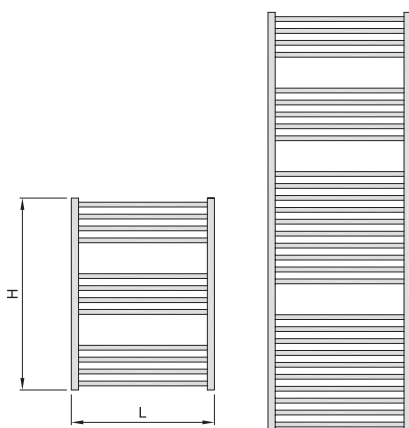

H: 1255
L: 500-600

H: 1755
L: 500-600

Fixing



Type	X [mm]	A [mm]
Metal brackets	60	80