


Material:	steel pipes $\varnothing 28\text{mm}$ steel pipes $\varnothing 28\text{ mm}$
Connection threads:	4xG1/2"
Testing overpressure:	1,3MPa
Max. op. overpressure:	1MPa
Max. op. temperature:	110°C
Number of pipes:	8,13,17


Connection options

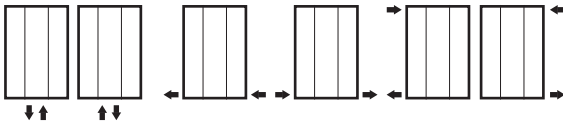

Height (H) Length (L) [mm] [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Output [W]		Power input [W]	Connection span [mm]	
					75/65/20°C	70/55/20°C			
1800/282	49	10,0	5,1	1,291	530	430	274	-	50
1800/462	49	16,5	8,3	1,291	855	693	442	-	50
1800/606	49	21,0	10,9	1,291	1064	863	550	-	50

Heat output according to EN 442. Weight is given without water and packaging. Thermostatic sets are not included in the delivery.

Type height (H) / length (L) [mm]

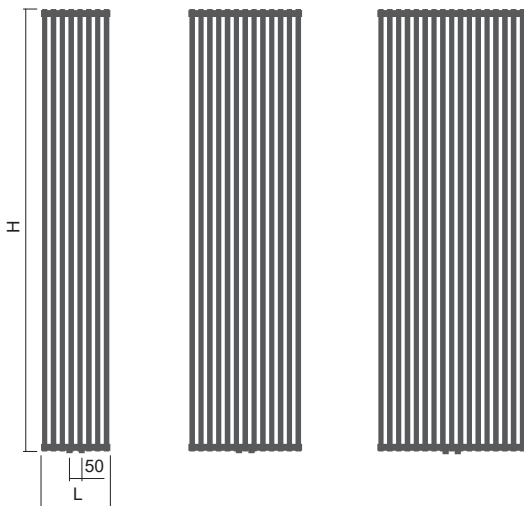


H: 1800
L: 0282

H: 1800
L: 0462

H: 1800
L: 0606



Mounting



Type	X [mm]	A [mm]
Metal brackets	55-65	89-99